9111 Series

H.D. 2.0mm(0.079") Futurebus(+)5 Rows Female Power Type

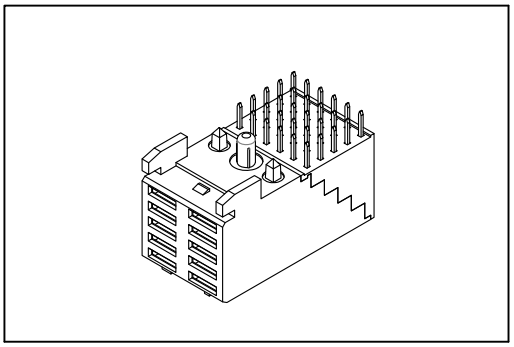

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 3 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:

* 2mm high density futurebus+ female power right angle solder and press fit type.
* 10 pins.
* High current rating.
* Side by side stackable.
* Push-Fit peg.









Dip Type



Press Fit Type



P.C. Board Layout

X Length	1	2
	2.90	3.53

Ordering information

9111-	5	4	10	1	C	10	D	U
Series	5: 5Rows	4: Female Power	Position	1: Dip Length 2: Dip Length	C: Selective Gold Plated	10: 10 μ"	D: Dip Type P: Press Fit Type	U: Tube Package

Information including designs, specifications and components may be changed or updated without notice.