


9111 Series

H.D. 2.0mm(0.079") Futurebus(+) 5 Rows Male Right Angle Type

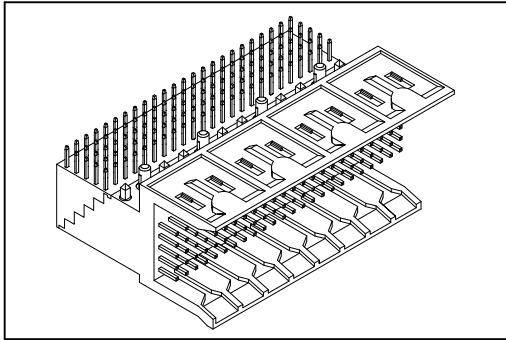

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.




Insulator Resistance: 1000MΩ min.

Contact Resistance: 30m Ωmax.


Operating Temperature: -55°C ~+125°C.

Features:


- * 2mm high density futurebus+ male solder and press fit type.
- * Available pin count from 30 ~ 240.
- * Side by side stackable.
- * Various solder tail length options.
- * Push-Fit peg.

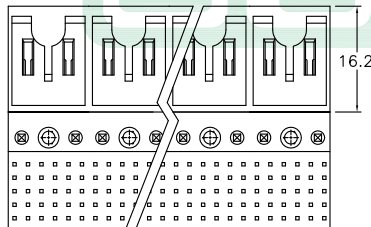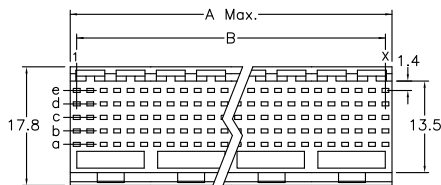

Dip Type



Press Fit Type

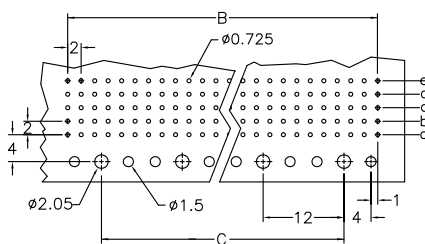

P.C. Board Layout

Contact Length (L)	A	5.00		
	B	5.75		
	E	6.50		
	F	7.25		
	H	8.00		
Dip Length (X)	1	2		
	2	2.90 3.53		
*"Available Position				
Position	Dimension			
		A	B	C
*	30	11.95	10.0	
*	60	23.95	22.0	12.0
*	90	35.95	34.0	24.0
*	120	47.95	46.0	36.0
*	150	59.95	58.0	48.0
*	180	71.95	70.0	60.0
*	210	83.95	82.0	72.0
*	240	95.95	94.0	84.0

Ordering information

9111- Series
5 5: 5Rows
5 5: Male Signal
30 Position
A A: A ~ H Contact Length
1 1: Dip Length
2 2: Dip Length
C C: Selective Gold Plated
10 10: 10 μ"
D D: Dip Type
P P: Press Fit Type
U U: Tube Package